



SCREW DETAIL



PART NUMBER	LENGTH
DA-MV-F05	1525±30
DA-MV-F10	3050±30
DA-MV-F15	4575±50

PIN ASSIGNMENT

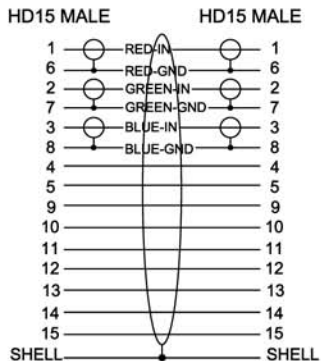

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a). 100% OPEN, SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE: 20 Mohm MIN.
DC 300V 0.01sec, 0.02sec.
 - (c). CONTACT RESISTANCE: 3 ohm MAX.



1275 Danner Drive Aurora, Ohio 44202
 Tel: 1-800-626-7801 Fax: 330-562-1999
 www.vpi.us sales@vpi.us